



# M6 HIEFF TWIN MONO BLACK by SUNPRO


**350-360**  
**HIGH EFFICIENCY**



ISO 14001

ISO 9001

ISO 45001

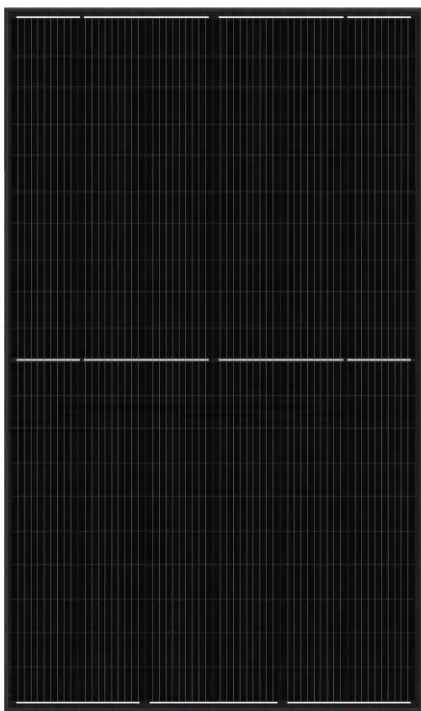

### POWER TOLERANCE

0~+3%



**WITHSTAND STRONG SNOW LOAD**  
**8000 Pa/ WIND LOAD 8000 Pa**



### NEW TECHNOLOGY: HIEFF UP TO 19,46%

Higher yield per surface area,  
lower BOS costs, higher power classes,  
and an efficiency rate of up to 19.46%.




### PRODUCT WITH HIEFF BY SUNPRO TECHNOLOGY

SUNPRO DUO combines cutting edge cell separation and innovative 9-busbar design with SUNPRO Technology.

## Reliability & Certification

Product Guarantee: **12-year**  
Linear Performance Warranty  
**12-year:90.7%** power output  
**25-year:80.2%** power output

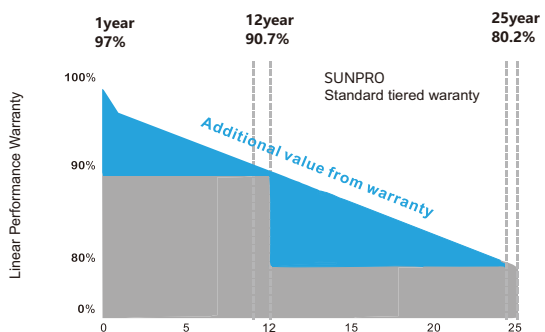

## Product Specification

Electrical parameters at standard test conditions  
(STC:AM=1.5, 1000W/m<sup>2</sup>, Cells Temperature 25°C)

Typical type	350W	355W	360W
Max power(Pmax)	350	355	360
Max power voltage(Vmp)	33.7	33.8	33.9
Max power current(Imp)	10.39	10.50	10.62
Open circuit voltage (Voc)	41.0	41.1	41.2
Short circuit current (Isc)	10.95	11.06	11.18
Module Efficiency(%)	18.92	19.19	19.46
Max system voltage	DC 1500V(TUV) / DC 1000V(TUV)		
Maximum Series Fuse Rating	20A		

## Mechanical Data

Item	Specification
Dimensions	1765x1048x35mm
Weight	20.2kgs
Front glass	3.2mm tempered glass
	4mm <sup>2</sup>
Output cables	symmetrical lengths
	1100mm
Connectors	Mc4 compatible IP68
Cell type	Mono-Crystalline PERC
	83mmx166mm
Number of cells	120 cells

## Temperature Characteristics

Item	Specification
Temp.Coeff.of Isc(TK Isc)	0.049%/°C
Temp.Coeff.of Voc(TK Voc)	-0.26%/°C
Temp.Coeff.of Pmax(TK Pmax)	-0.34%/°C
Operating temperature	-40~+85°C
Normal operating cell temperature	45±2°C


## Packing Configuration

Item	Specification
Container	20'GP      40'GP      40'HQ
Pieces per pallet	58      60      64
Pallets per container	6      13      13
Pieces per container	348      780      832

## Test, Certifications and Warranties


Item	Specification
Standard tests	IEC 61215, IEC 61730, IEC 61701, IEC 62716, PPP 58042B
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TUV, AMMONIA AND SALT MIST CORROSION, ANTI-PID, CE, WEEE, INMERTRO
Extreme wind and snow loads testing	Withstand extreme wind(8000 Pascal) and snow loads(8000 Pascal)
Power tolerance	0~+3%
Junction box	IP68
Warranties	12 years product warranty and 25 years 80% of power

## Dimensions and Structure

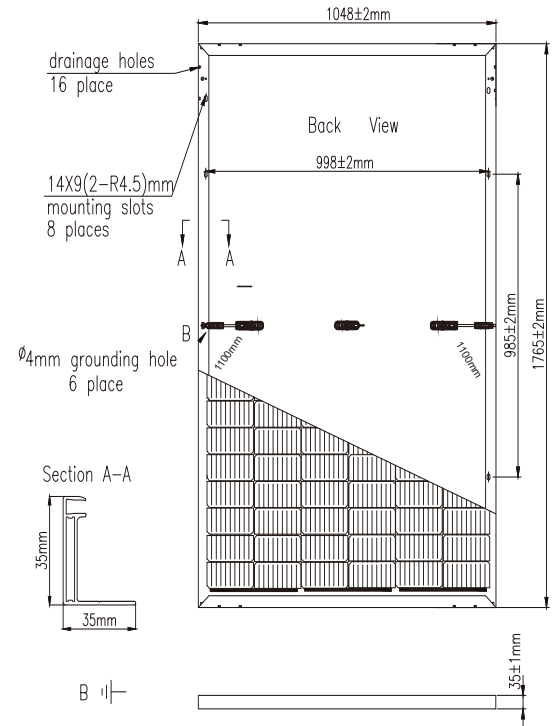

## I-V Curve

I-V characteristics at different irradiances

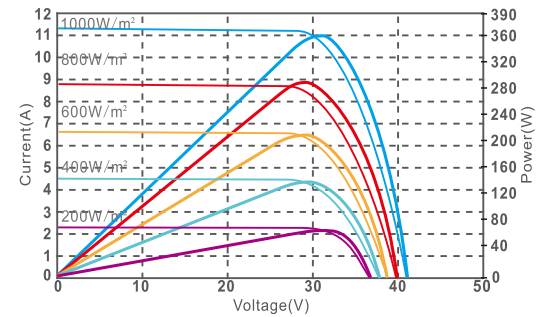

I-V characteristics at different temperature

